

BAR LINE - Self Contained Machine Bistrot Cube

BAR LINE

ICE - MACHINES

B 9050

Also available in the self-contained range for "Bistrot" cube: **B 1706, B 2608, B 3515, B 4422, B 5522, B 7040, B 8040**
See pertaining literature for more details



B 9050 AS/WS



Bar-Line Equipment range is the newly released EU made ice makers for Thimble-shaped rounded ice cubes coming from Bar-Line. Built in the Italian manufacturing plant of Frimont Spa, ISO 9001 Certified, these units are built with sturdy, corrosion resistant stainless steel, and feature European made componentry to assure maximum quality and reliability. Tested one by one, the Bar-Line self contained units feature well balanced ratio between production and storage capacity, alongside with reduced outer dimensions that allow for built-in installations. Front air louvers assure appropriate airflow in critical install requirements. Contemporary, elegant design unites excellent operational features with the reliability obtained through years of successful experience in ice making technology. Insulated bin door and ice storage bin minimize air condensation and water formation on equipment surfaces. Electromechanic controls maximise reliability and ease of repair during the entire life of the equipment.

- ✓ **2014 FUNCTIONALITY IMPROVEMENTS:**
- ✓ Improved water distribution system alongside with evaporator assembly: a larger number of ice cubes is now produced per each cycle, while the newly designed water distribution spray system provides best evaporator surface coverage and is simple to remove during routine cleaning.
- ✓ Optimized dimensions and production/storage ratios. Easier to fit even under lowest bar counters and in reduced footprint spaces.
- ✓ Front panel installed thermostatic controls for ice cube size and storage bin ice level sensor. Easily accessible, allow for an easy adjustment of the key working parameters of the machine.
- ✓ Bin door slide rollers for a smooth open-close movement, with door movement rubber, sound dampening, shock absorbers.
- ✓ Utilities connection may run through side panel openings, for a reduced depth installation requirement.




BAR LINE - Self Contained Machine Bistrot Cube

BAR LINE

ICE - MACHINES

B 9050

Also available in the self-contained range for "Bistrot" cube: B 1706, B 2608, B 3515, B 4422, B 5522, B 7040, B 8040
See pertaining literature for more details.

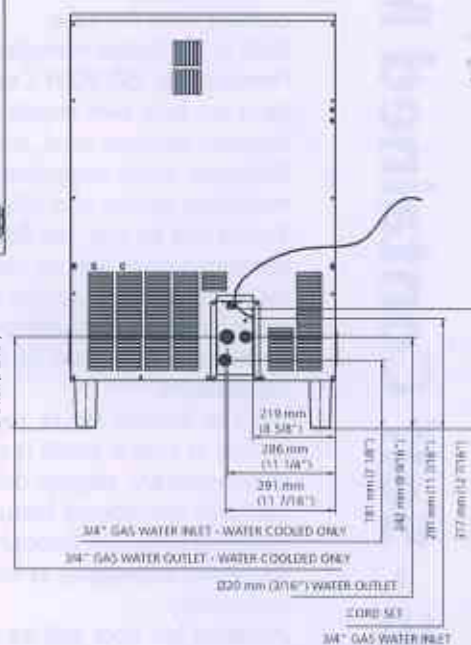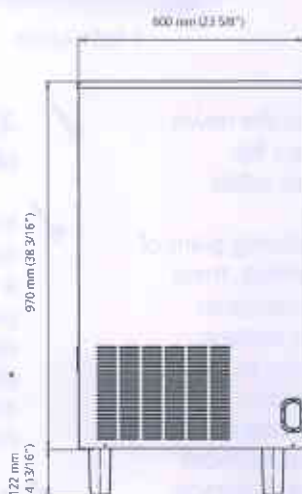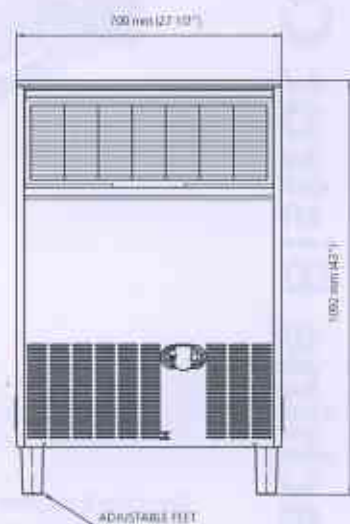

OPERATING LIMITS	
Air Temp. Range	10°C - 43°C
Water Temp. Range	5°C - 38°C
Water Pressure	Min. 0.8 bar Max 5 bar
Electrical Voltage	230V/50Hz/pH (on selected models)

All specifications and performance data are subject to normal manufacturing variances.
All units have stainless steel finish.



ORDERING AND SPECIFICATION INFORMATION

Model No.	Cond unit	ICE Production per 24 hrs. at 10°C Air/10°C Water Kg	ICE Production per 24 hrs. at 21°C Air/15°C Water Kg	Bin storage Kg	Voltage Characteristics	Refrigerant	Water Consumption L/h	Electric Consumption	Net Weight Kg	Max Shipping Weight Kg
B 9050 AS	Air	n.a.	90	50	230/50/1	R404A	n.a.	n.a.	58	67
B 9050 WS	Water	n.a.	90	50	230/50/1	R404A	n.a.	n.a.	58	67



We reserve the right to make changes in design and construction at any time without obligation.
ADV-Bar-Line 9/2013

BAR LINE

ICE - MACHINES

Frimont S.p.A.
Via Lainate 31/b - 20010 Pogliano Milanese - (Milano) Italy
Tel +39 02.93960.239 - Fax +39.02.93960.201
barline@frimont.it - www.barline.it